

LMDL - 38

Halogen Downlight






Applications

- A recessed downlight with fixed lamp position, Lumitron's LMDL-38, is suitable for low voltage halogen MR16. Ideal for commercial lighting applications, exhibition halls, exclusive residential projects, decorative applications, shopping arcades, hotels, condominiums, and etc.

Specifications

- Housing: die-cast aluminium body for superior corrosion resistance.
- Trim: die-cast aluminium.
- Suitable for 12V MR16 20W up to 50W, 220V 50W PAR16.
- Polyester powder-coating in: (add suffixes to Catalog No.)
 - -W: White color
 - -B: Black color
- Lampholders: GX5.3.
- Transformer: magnetic or electronic transformer . Not required for PAR16 220V lamp.
- Mounting: recessed mounting by supporting clips and fasteners.
- Diameter 78mm, cut-out 70mm.

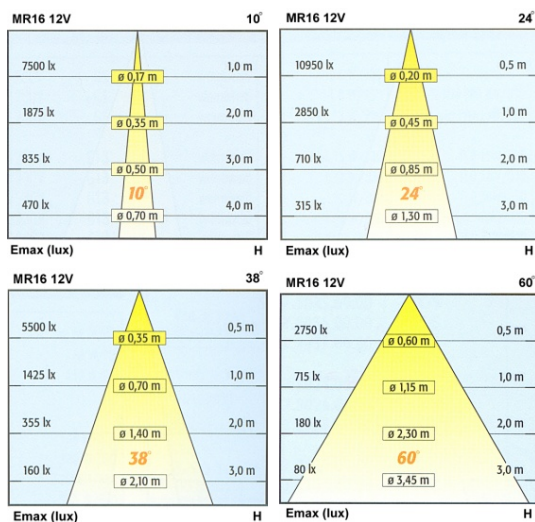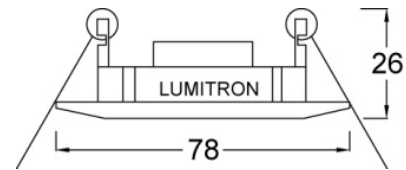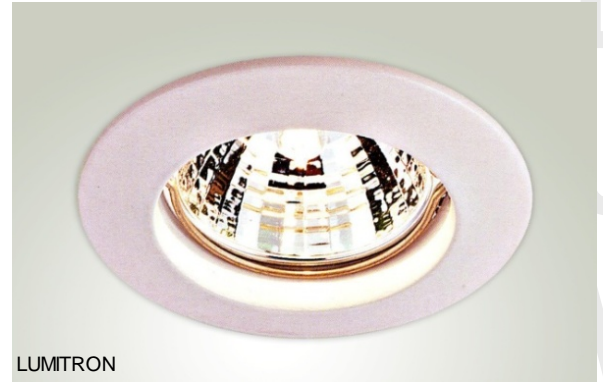

LUMITRON REF.	Lamp	Beam Angle	Color Temp	Base
LMDL-38-20MR16	MR16 20W	10°-40°	3,000K	Gx5.3
LMDL-38-35MR16	MR16 35W	10°-40°	3,000K	Gx5.3
LMDL-38-50MR16	MR16 50W	10°-40°	3,000K	Gx5.3