

## LMTL - 2

### Track & Spot Light Halogen

#### Applications



A range of versatile surface mounted spot light , Lumitron's LMTL-2, is suitable for low voltage halogen MR16, 20-50W. When use without integral transformer, it would be applicable for emergency lighting for emergency power supply. Ideal for indoor commercial lighting applications, exhibition halls, exclusive residential projects, decorative applications, shopping arcades, hotels, condominiums, and etc. Applicable for corridors, sign boards, banner lighting, and other task lighting.

#### Specifications

- Housing: die-cast aluminium body for superior corrosion resistance.
- Polyester powder-coating in white, black. and Silver.
- Adjustable U-shape bracket, allows to adjust aiming direction.
- Lamp beam angle 10°, 40°, and 40°. Recheck lamp specifications.
- Suitable for 12V MR16 20W up to 50W.
- Lampholder: GX5.3, ceramic type.
- Low power consumption transformer 220V / 12V 50Hz.
- Option
- -SM: Surface mounting.
- -TM: Track mounting.

*Indy*  
decorative lights

**Lumitron**

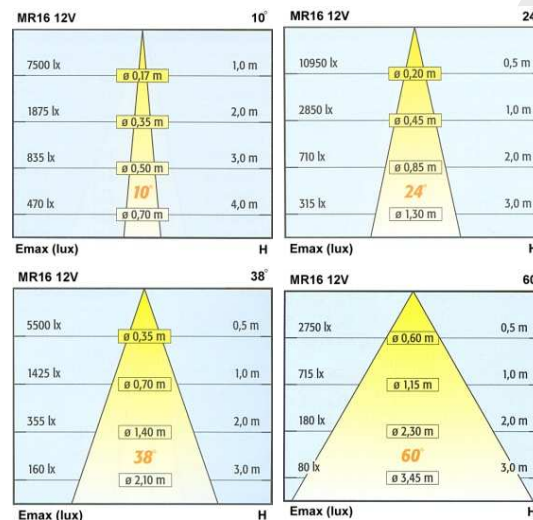

Lumitron Ref.	Lamp Type	Beam Angle	Color Temp (K)	Volt	Base
LMTL-2-20MR16	MR16 20W	10°-40°	3,000	12V	GX5.3
LMTL-2-35MR16	MR16 35W	10°-40°	3,000	12V	GX5.3
LMTL-2-50MR16	MR16 50W	10°-40°	3,000	12V	GX5.3