CORNICE

Linear Luminaire T5 / LED





Architectural inground uplight luminaires. Lumitron's Cornice, designed for decorative amenity applications as decorative upward or wall lightings for hotels, shopping arcades, and gardens. Applicable for fluorescent T5 and LED lamps. Ideal for terraces, corridors, walkways, walls, perimeters, visual guide lights, entrances, and facades.


Specifications

- Housing: corrosion resistant die cast aluminium body with powder coating finish.
- Anodized aluminium reflector chemically brighten.
- High impact, shock resistant, clear safety tempered glass.

- Stainless steel screws.
- Durable silicone rubber gaskets.
- Lampholders: G5 base.
- Built-in Electronic Ballast.
- Vandal resistant, dust-tight and jetproof IP65.
- Class I Electrical to DIN, VDE, and IEC.
- Installation: surface mounting.

Accessories (add suffixes to Lumitron Ref.)

□ -CF: Color filters: Blue, Red, Yellow, and Green

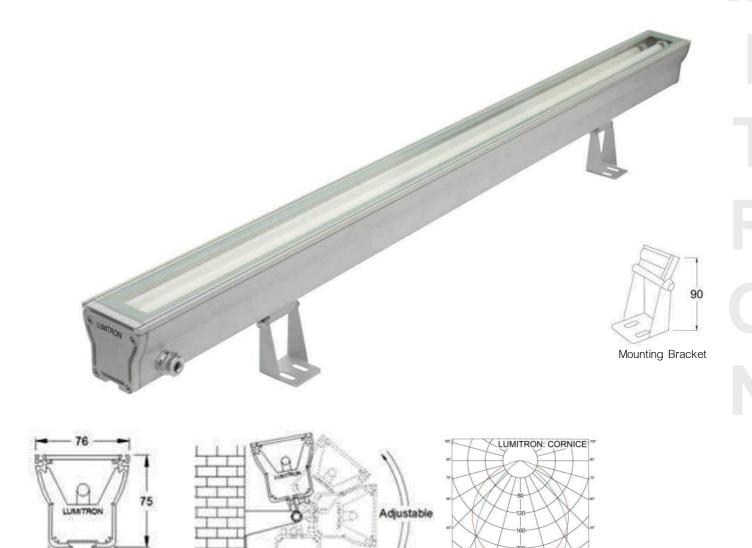

LUMITRON REF.	Lamp	Length L (mm)	Lumen	Color Temp	Base
LMCN-14T5	T5 14W	638	1,100-1,200	3,000-6,500K	G5
LMCN-21T5	T5 21W	942	1,750-1,900	3,000-6,500K	G5
LMCN-28T5	T5 28W	1,238	2,400-2,600	3,000-6,500K	G5
LMCN-35T5	T5 35W	1,538	3,050-3,300	3,000-6,500K	G5
LMCN-140LED	140 LED, 34W 12VDC	1,238	White, Red, Green, Blue, Yellow		
LMCN-140LEDRGB	140 LEDRGB, 34W 12VDC	1,238	LED RGB Color Change		

www.lumitronlighting.com