



LMWU

An aesthetically pleasing designed, architectural wall luminaires, Lumitron's LMWU is ideal for both outdoor and indoor applications. Such as walls, ceilings, corridors, building facades, walkways, especially for exclusive projects.

Specifications

- Housing: corrosion resistant die cast aluminium body and faceplate.
- UV-stabilized polyester powder coat finish in White RAL 9003, or Black RAL 9005. Other color available on request.
- Reflector: high purity, anodized aluminium reflector providing asymmetrical wide beam distribution.

- Diffuser: temperature shock, safety tempered glass lens.
- Stainless steel screws and durable silicone rubber gasket.
- Built-in control gear: accommodates ballast, ignitor, and P.F. correction capacitor. Lumitron offers only anti-cycling, super-imposed ignitor to avoid ballast failures during ends of lamp life.
- IP 65 Vandal resistant, dust-tight and water-jetproof.
- Conforming to DIN, VDE, IEC Class I Electrical.
- Choices of fixture head:
 - Type A: single head (1 lamp)
 - Type B: twin heads (2 lamps)

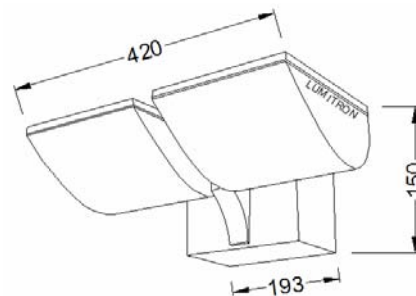

Ordering Information

Lumitron Ref.	Lamp Type	Beam Angle	Color Temp.	Base	Remarks
LMWU-150HAL-DE	HAL-DE 150W	2,600	3,000K	R7s	Recheck lumen with lamp catalog.
LMWU-70HPS-DE	HPS-DE 70W	6,800	2,000K	RX7s	
LMWU-150HPS-DE	HPS-DE 150W	15,000	2,000K	RX7s	
LMWU-70MH-DE	MH-DE 70W	5,500	3,000-4,200K	RX7s	
LMWU-150MH-DE	MH-DE 150W	11,250	3,000-4,200K	RX7s	