

LMDL - 18

High Output Compact Fluorescent Downlight



A range of efficient recessed downlight, horizontal lamp direction. Lumitron's LMDL-18 downlight, allows wide selection of compact fluorescent lamp range from 18W up to 42W, single or twin lamp. Suitable for commercial lighting applications, exclusive residential projects, shopping arcades, hotels, restaurants, condominiums, and etc.

Specifications

- Suitable for single or twin compact fluorescent 18W up to 42W.
 - Reflector: heat resistant, high quality satin matt low brightness.
 - Trim: white polyester powder coating frame. Optional: steel trim, or plastic trim in blue, green, pink, and white.
 - Housing: white polyester powder coating.
 - Gearbox: galvanized steel with white polyester powder coating. Remote mounted ballast box.
 - Mounting: recessed mounting by employing support and fixing brackets.
- Supplied with HPF electronic ballast for 32W and 42 W version.
Magnetic ballast with P.F.-correction capacitor for 18W and 26W.

Accessories (add suffixes to Lumitron Ref.)

- RB: remote ballast -TB: ballast on top of luminaire
- SFG: Surface Frosted Glass

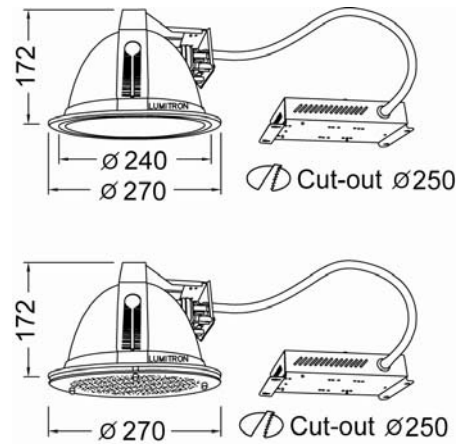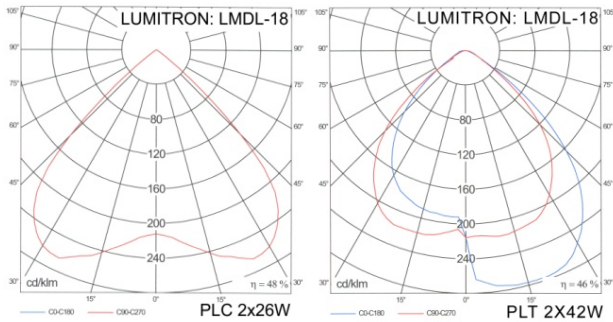

LUMITRON REF.	Lamp Type	Lumen	Base
LMDL-17-13PLC	PLC 1x13W	1x900	G24d
LMDL-17-213PLC	PLC 2x13W	2x900	G24d
LMDL-17-18PLC	PLC 1x18W	1x1,200	G24d
LMDL-17-218PLC	PLC 2x18W	2x1,200	G24d
LMDL-17-26PLC	PLC 1x26W	1x1,800	G24d
LMDL-17-226PLC	PLC 2x26W	2x1,800	G24d
LMDL-17-32PLT	PLT 1x32W	1x2,400	GX24q
LMDL-17-232PLT	PLT 2x32W	2x2,400	GX24q