


## LMBL - 39

### Architectural Bollards - IP 55

Architectural bollards luminaries with low glare at normal viewing angles. It expresses safety, strength and harmony in urban amenity lighting applications. Lumitron's LMBL-39, is suitable for gardens, parks, public spaces, residential areas, hotel premises, building perimeters, etc.

#### Specifications

- Housing: corrosion resistant die cast aluminium body on galvanized steel post.
- UV-stabilized polyester powder coating finish in Black RAL 9005. Other color available on request.
- Non-aging silicone rubber gasket.
- Stainless steel screws
- Built-in control gear.
- Lumitron offers only anti-cycling ignitor, super-posed versions to avoid ballast failures during ends of lamp life.
- Vandal resistant, dustproof and jetproof IP55
- Conforming to DIN, VDE, IEC Class I Electrical

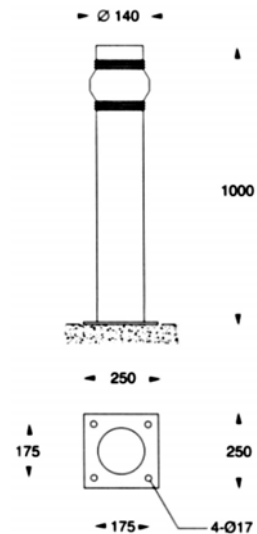

#### Ordering Information

Lumitron Ref.	Lamp Type	Lumens	Color Temp (K)	Base	Remark
LMBL-39-100GLS	GLS 100W	1,380	2,700	E27	Recheck lumen with lamp catalog.
LMBL-39-20PLE	PLE 20W	1,200	2,700-4,000	E27	
LMBL-39-18PLC	PLC 18W	1,200	2,700-4,000	G24d-2	
LMBL-39-26PLC	PLC 26W	1,800	2,700-4,000	G24d-3	
LMBL-39-80MV	MV 80W	4,000	4,000	E27	