


## LMWL - 8

### Wall Surface Mounted Down Light - IP 55

Architectural wall luminaries, Lumitron's LMWL-8, is specifically designed for decorative amenity applications such as public areas, commercial and residential areas. Applicable for various types of light source, including compact fluorescent lamps for energy saving applications. Ideal for terraces, corridors, walkways, columns, trees, entrances, and facades.

#### Specifications

- Corrosion resistant, die cast aluminium body.
- Colour: UV resistant polyester powder coat finish in White RAL 9010, Black RAL 9005, or silver aluminium color.
- Reflector: high purity, anodized aluminium reflector.
- Diffuser: heat-resistant, safety tempered glass lens.
- Stainless steel screws.
- Durable silicone rubber gasket.
- Lampholder: VDE approved E27, G24d-3.
- Standards: IP55 dust-proof and jet-proof.
- Conforming to DIN, VDE, IEC598-2-3, Class I Electrical.

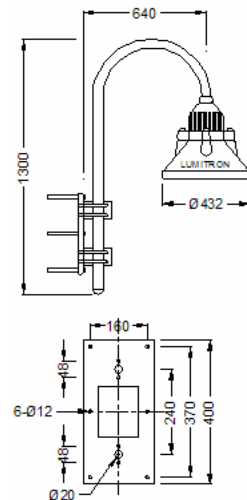

#### Ordering Information

Lumitron Ref.	Lamp Type	Lumen	Color Temp.	Base	Remarks
LMWL-8-150HPS	HPS 150W	14,500	2,000K	E40	Recheck lumen with lamp catalog.
LMWL-8-250HPS	HPS 250W	27,000	2,000K	E40	
LMWL-8-150MH	MH 150W	14,250	3,200-4,000K	E27	
LMWL-8-250MH	MH 250W	20,000	3,200-4,000K	E40	