


Wall Light


A range of durable architectural wall luminaires suitable for walls, corridors, building facades, walkways, especially ramps for building's car park areas. Provide low glare lighting as the light is downwardly controlled for maximum illumination to the walkway or driveway. Lumitron's LMWL-52, is designed to efficiently utilize compact fluorescent and halogen lamp.

Specifications

- Housing: corrosion resistant die cast aluminium body and faceplate.
- UV-stabilized polyester powder coat finish in Black RAL 9005. Other color available on request.
- Reflector: high purity, anodized aluminium reflector.
- Diffuser: temperature shock, heat resistant, safety tempered glass lens.
- Vandal resistant construction.
- Stainless steel screws and silicone rubber gasket.
- Built-in control gear.
- Control Gear: built-in type
- Lampholder G9, GY6.35, G24d-1 VDE approved.
- Standards: IP65 dust-tight and jet-proof.
- Conforming to DIN, VDE, IEC598-2-3, Class I Electrical.
- Installation/Mounting: wall mounted by plastic recessed box.



LMWL-52

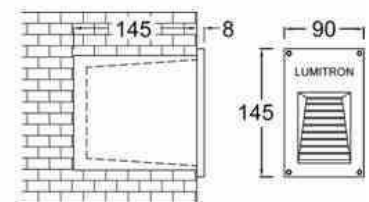

LMWL-52D

LUMITRON REF.	Lamp	Lumen	Base
LMWL-52-50JC	JC 50W 12V	930	GY6.35
LMWL-52-40JCD	JCD 40W 220V	490	G9
LMWL-52-10PLC	PLC 10W	600	G24d
LMWL-52D-LED	LED	Red,Green,Blue,White	