


LMST - 2

13-18W PLC, 60W GLS Wall & Step Lights - IP 55

A high quality, premium-grade architectural lights as an ideal lighting solution for a wide variety of amenity areas, blending harmoniously with traditional and modern landscapes. Providing visual comforts and continuity, allowing the designers to achieve attractive styling and desirable theme. Lumitron's LMST-2 is specifically designed to incorporate long life compact fluorescent lamps. The low lamp wattages have significantly reduced the energy consumption of the units thus reducing the heat generated and the associated running costs. Ideal for steps, walls, walkways, stairways in residential, commercial or public areas.

Specifications

- Housing: sturdy construction, corrosion resistant die cast aluminium body and faceplate.
- Diffuser: high impact resistant, ultra violet (UV) stabilized frosted safety tempered glass diffuser.
- UV-stabilized polyester powder coating finish in black, white, silver. Other color available on request.
- Resistant to vandalism.
- Stainless steel screws.
- Sealed with durable silicone rubber gasket.
- Open with tools only.
- Built-in control gear.
- Suitable for recessed mounting in concrete or other surface.
- IP 55 Vandal resistant, dustproof and water jet-proof.
- Conforming to DIN, VDE, IEC, EN-60598-2. Class I Electrical.

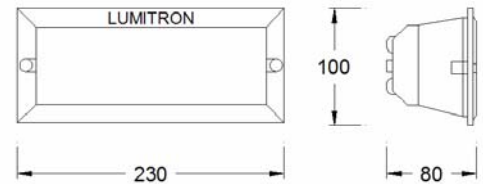

Stainless Steel Version

Ordering Information

Lumitron Ref.	Lamp Type	Lumen	Color Temp.	Base	Remarks
LMST-2-60GLS	GLS 60W	730	2,700K	E27	Recheck lumen with lamp catalog.
LMST-2-11PLE-T	PLE-T 11W	600	2,700-4,000K	E27	
LMST-2-15PLE-T	PLE-T 15W	900	2,700-4,000K	E27	
LMST-2-7PLS	PLS 7W	400	2,700-4,000K	G23	
LMST-2-9PLS	PLS 9W	600	2,700-4,000K	G23	
LMST-2-13PLC	PLC 13W	900	2,700-4,000K	G24d-1	
LMST-2-18PLC	PLC 18W	1,200	2,700-4,000K	G24d-2	