



LMRW - 30

Street Light / Area Light - IP 55


An extensive design range of premium street lantern offering efficient lighting for safe and comfortable driving. Lumitron's LMRW-30, is designed to accept wide range of discharge lamps. Thanks to its unique shape and form. It provides elegant appearance, aesthetically suitable for prestigious projects. Ideal for major traffic roads, residential streets, arenas, modern architectural environments. Recommended mounting height of 4000-7000 mm.

Specifications


- Housing: corrosion resistant, die cast aluminium alloy.
- UV stabilized polyester powder coat finish in White, Black, Silver.
- Reflector: anodized aluminium reflector.
- Diffuser: heat resistant, safety tempered glass lens.
- Lampholder: porcelain E27 or E40, 5 KV pulse rating.
- Sealed with silicone rubber gasket.
- Control Gear: Lumitron fixtures are standard with P.F corrected system. Lumitron employs only super-imposed ignitor (where required) to avoid ballast failures during ends of lamp life.
- High voltage, heat-resistant cable employed where applicable.
- Protection level IP55 dust-proof and jet-proof.
- Conforming to DIN, VDE, IEC Class I Electrical.

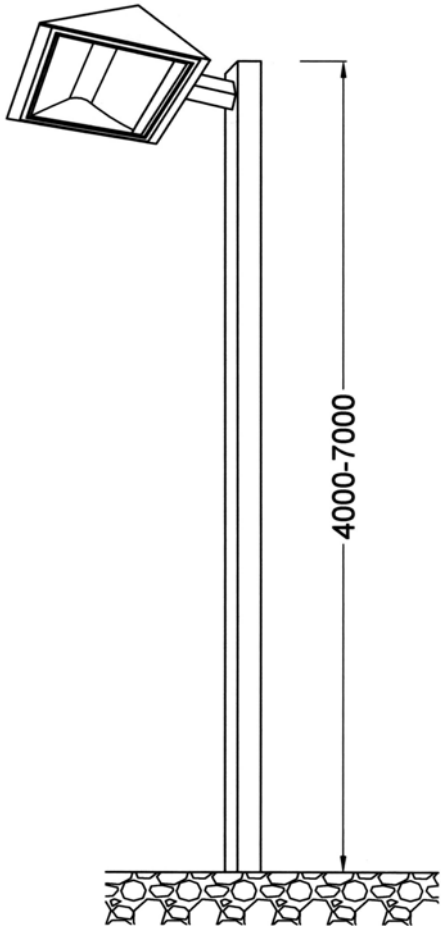


Type A for Streetlight



Type B for Streetlight



Type A for Wall Mounting



Type B for Wall Mounting

Ordering Information

Lumitron Ref.	Lamp Type	Lumens	CCT. (K)	Base	Remark
LMRW-30-150HPS	HPS 150W	14,500	2,000	E40	Recheck lumen with lamp catalog.
LMRW-30-250HPS	HPS 250W	27,000	2,000	E40	Mounting option: <input type="checkbox"/> Streetlight <input type="checkbox"/> Wall mounting
LMRW-30-100MH	MH 100W	8,500	3,200-4,000	E27	
LMRW-30-150MH	MH 150W	14,250	3,200-4,000	E27	
LMRW-30-250MH	MH 250W	21,000	4,000-6,000	E40	