

UMITRON

LMPT - 48

Architectural Post Light - IP 54

A unique range of decorative post light, Lumitron's LMPT-48 luminaire, is designed to achieve superior lighting functionality whilst providing attractive styling and desirable theme, especially for prestigious projects. Ideal for landscape applications such as, exhibition halls, department stores, gardens, parks, hotels, residential areas, precincts, walkways, and other amenity areas.

Specifications

• Housing: die cast aluminium body and extruded aluminium pole.

• UV-stabilized polyester powder coat finish in white, black, silver color.

• Choices of diffuser:

OP: Opal Polycarbonate

Generation FG: Frosted Glass


• Stainless steel screws and sealed with silicone rubber gasket.

• Integral control gear, service door with fused cable connecting box.

• Protection level IP54 Dust-proof and splash-proof conforming to

DIN, VDE, IEC. Class I Electrical.

• Available pole height: 1M, 1.5M, 3M, 4M. Other height available on request.

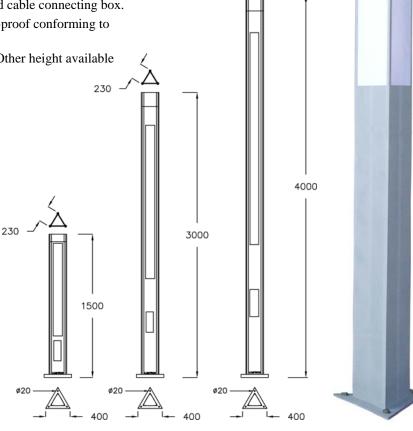

230

Ordering Information

Lumitron Ref.	Lamp Type	Lumen	Color Temp.	Base
LMPT-48-70CDM-T-4M	CDM-T 70W	6,600	3,000-4,200K	G12
LMPT-48-150CDM-T-4M	CDM-T 150W	14,000	3,000-4,200K	G12