


## LMPT - 68

### Architectural Post Light - IP 55

An architecture of decorative post light, Lumitron's LMPT-68 luminaire, is designed to achieve superior lighting functionality whilst providing attractive styling and desirable theme, especially for prestigious projects. Ideal for landscape applications such as, exhibition halls, department stores, gardens, parks, hotels, residential areas, precincts, walkways, and other amenity areas.

#### Specifications

- Housing: corrosion resistant die cast aluminium alloy.
- UV stabilized polyester powder coat finish in White, Black, Silver.
- Reflector: anodized aluminium reflector.
- Diffuser: UV-Stabilized polycarbonate. Choices of diffuser:
  - ☐ OP: opal diffuser
  - ☐ CL: clear diffuser with aluminium louver
- Stainless steel screws and silicone rubber gasket.
- Control Gear: built-in type, accommodates ballast, ignitor, lampholders VDE approved, and P.F. correction capacitors.
- Lumitron offers only anti-cycling ignitor, super-posed versions to avoid ballast failures during ends of lamp life.
- Protection level IP55 dust-proof and jet-proof.
- Conforming to DIN, VDE, IEC Class I Electrical.

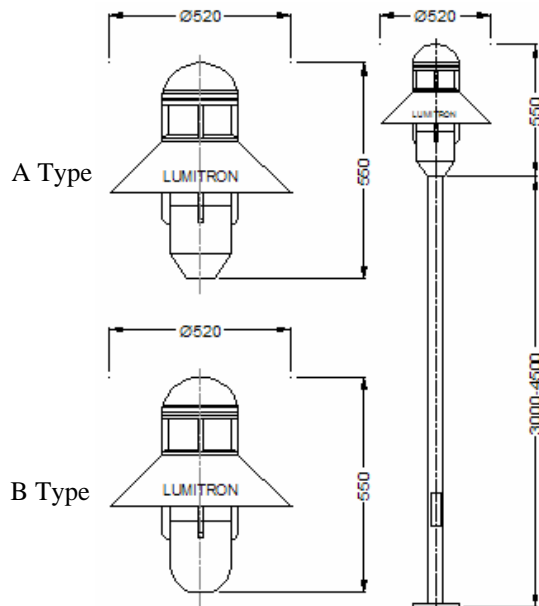

#### Ordering Information

Lumitron Ref.	Lamp Type	Lumen	Color Temp.	Base	Remarks
LMPT-68A (Type A)	MV 80W	3,800	4,000K	E27	Recheck lumen with lamp catalog.
LMPT-68B (Type B)	HPS 70W	5,600	2,000K	E27	<input type="checkbox"/> AP: Extruded Aluminium pole.
	MH 70W	5,300	3,200-4,000K	E27	<input type="checkbox"/> SP: Galvanized Steel pole.