

XPS SERIES

X
P
S

Explosion Proof Edge Lit LED Multipurpose Sign


- Class I, Division 1, Groups C & D
- Class II, Division 1, Groups E, F & G
- Class III
- Class I, Zone 1, Groups IIA, IIB,
- Zone 2, Groups IIA, IIB + H2 & IIC
- UL 844, UL 8750 & UL 924
- UL1598A Marine Outside Type
- Temperature Class (T-Rating)-T6
- Patent No. 7,287,347
- IP65



AZZ | R-A-L™
RIG-A-LITE

XPS SERIES

Explosion Proof Edge Lit LED Multipurpose Sign

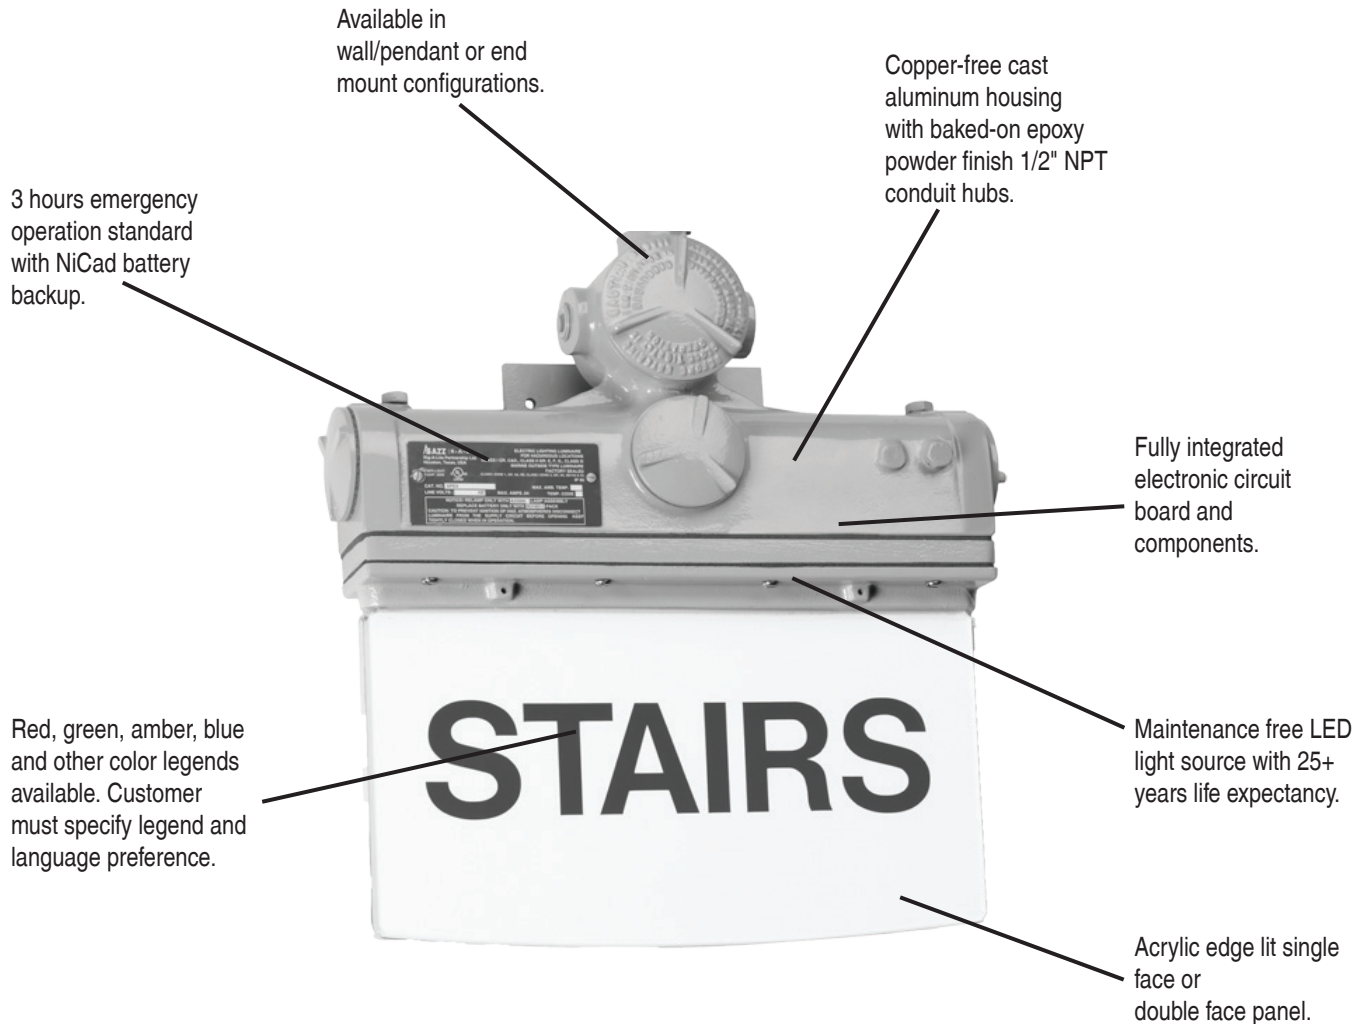

Patent Number 7,287,347


XPS series fixture uses a maintenance free LED light source with a 25 year life expectancy. Emergency fixtures meet or exceed Energy Star and OSHA requirements. These fixtures are also suitable for installation in wet or damp locations where salt water spray is possible.

XPS Series

Explosion Proof • UL 844 • UL 924 • UL 1598A Marine Outside Type • Factory Sealed

Catalog Number Logic

XPS



1

BASIC SERIES

XPS Explosion Proof LED Sign Light*

*Customer must specify sign color and legend

Class I, Division 1, Groups C, & D

Class II, Division 1, Groups E, F & G

Class III

Class I, Zone 1, Groups IIA, IIB,

Zone 2, Groups IIA, IIB + H2 & IIC

Marine Outside Type

UL 1598A, 8750, 844 & 924

IP65

Temperature Class (T-Rating)-T6

3

LEGEND COLOR

A = Amber

B = Blue

R = Red

G = Green

X = Other (Contact Factory)

4

VOLTAGE/FREQUENCY

DT = 120/277V 60HZ

24 = 220-240V 50/60HZ

Other voltages available- consult factory

2

NUMBER OF FACES

1 = Single Face

2 = Double Face

5

MOUNTING

WP = Wall/Pendant Mounting

EB = End Bracket

6

OPTIONS¹

EM = Emergency Battery Backup

X = Specify Legend (Cannot Say EXIT)

¹Consult factory for pricing.

Maximum Input Power

Red no battery- 1.5 Watts

Red with battery- 2.5 Watts

Green no battery- 2.3 Watts

Green with battery- 3.0 Watts

Operating Temperature Range

Temperature Rating- T6

Red Legend

+10° C Minimum to +55° C Maximum

Green Legend


+10° C Minimum to +40° C Maximum

Catalog logic is for explaining catalog number structure only. Not all combinations are possible; consult factory for catalog numbers not listed in charts.

XPS Series

Explosion Proof • UL 844 • UL 924 • UL 1598A Marine Outside Type • Factory Sealed

XPS Series Fixture Dimensions (inches)

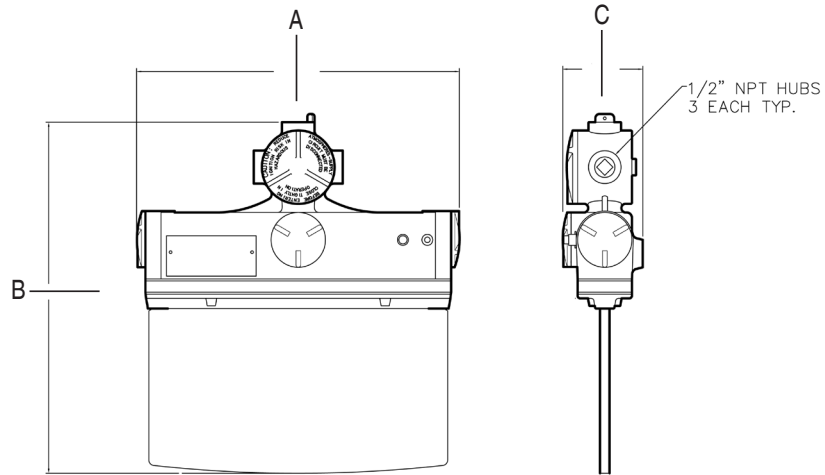

XPS SERIES	Dimensions (inches)			Boxed Weight	Shipping Volume (Boxed Fixtures)
	A	B	C		
XPS LED Exit Sign/Light	14.88	16.00	3.69	14 lbs.	1.24 cu. ft.