


# LED Floodlight - IP66




ITFL-107-BM



ITFL-107-UB



ITFL - 107-UB




ITFL - 107-BM

## ITFL-107


16W, 1 COB LED



15W, 6 LED (Color Change)




22W, 8 LED (Fixed Color)

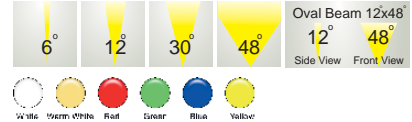


ITFL-106-BM



ITFL-106-UB



ITFL - 106-UB




ITFL - 106-BM

## ITFL-106

30W, 1 COB LED



36W, 15 LED (Color Change)




28W, 15 LED (Fixed Color)




ITFL-115AS-BM



ITFL-115-UB




ITFL-115-UB




ITFL-115-BM

## ITFL-115

102W, 48 LED




60W, 30 LED



## ITFL-115AS

Asymmetrical

60W, 30 LED (Fixed Color)



Industrial

Die Cast Aluminium Body	Safety Tempered Glass	90-265 VAC	50/60Hz Frequency Range	DMX512 Control Mode	-25°C to +50°C Ambient Temperature	IP66	ENERGY SAVING
-------------------------	-----------------------	------------	-------------------------	---------------------	------------------------------------	------	---------------