


# LED Floodlight - IP65





Die Cast Aluminium Body	Safety Tempered Glass	CRI >80	100-240 VAC	≥0.95 Power Factor
-------------------------	-----------------------	---------	-------------	--------------------

**IP65**




## ITFL-75

REF.	วัตต์	ลูเมน	ใช้แทน
ITFL-75-50W	50W	4,150-4,500	MV 250W, MH-HPS 100-150W
ITFL-75-80W	80W	6,640-7,200	MV 400W, MH-HPS 150W-250W
ITFL-75-100W	100W	8,300-9,000	MV 400W, MH-HPS 150W-250W

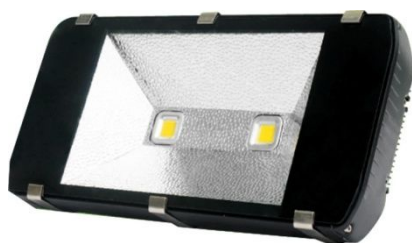



## ITFL-67

REF.	วัตต์	ลูเมน	ใช้แทน
ITFL-67-100W	100W	8,300-9,000	MV 400W, MH-HPS 150W-250W
ITFL-67-120W	120W	9,960-10,800	MV 400W, MH-HPS 250W
ITFL-67-160W	160W	13,280-14,400	MV 400W, MH-HPS 250W-400W
ITFL-67-200W	200W	16,600-18,000	MV 400W, MH-HPS 250W-400W



## ITFL-77

REF.	วัตต์	ลูเมน	ใช้แทน
ITFL-77-150W	150W	12,450-13,500	MV 400W, MH-HPS 250W-400W
ITFL-77-180W	180W	14,940-16,200	MV 400W, MH-HPS 250W-400W

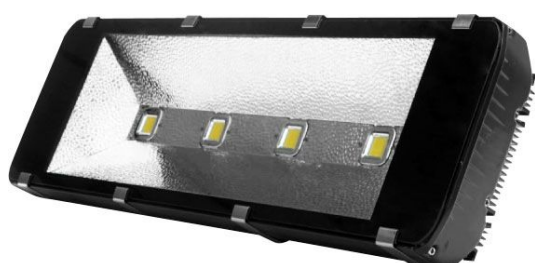

## ITFL-79

REF.	วัตต์	ลูเมน	ใช้แทน
ITFL-79-200W	200W	16,600-18,000	MV 400W, MH-HPS 250W-400W
ITFL-79-240W	240W	19,920-21,600	MH-HPS 400W