


LED Floodlight




Die Cast Aluminium Body	Safety Tempered Glass	CRI >80	100-240 VAC	≥0.95 Power Factor	IP65	ENERGY SAVING	Oval Beam 150°x75° 120° Side View 60° Front View	Warm White Neutral White Daylight White
-------------------------	-----------------------	---------	-------------	--------------------	------	---------------	--	---

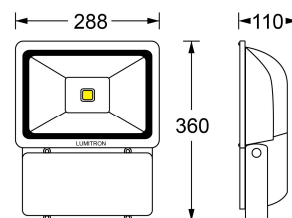


ITFL-81

REF.	วัตต์	ลูเมน	ใช้แทน
ITFL-81-70W	70W	5,100-5,700	MH 250W, MH-PHS 100-150W
ITFL-81-80W	80W	5,950-6,650	MH 250W, MH-PHS 100-150W
ITFL-81-100W	100W	6,800-7,600	MH 250W, MH-PHS 100-150W

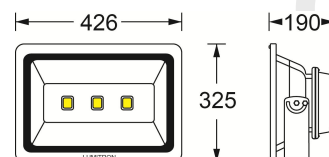

ITFL-82

REF.	วัตต์	ลูเมน	ใช้แทน
ITFL-82-150W	3x50W	12,450-13,500	MH 400W, MH-HPS 250W

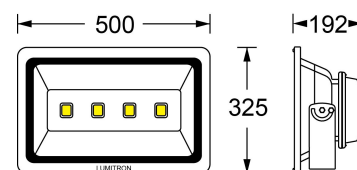

ITFL-176

REF.	วัตต์	ลูเมน	ใช้แทน
ITFL-176-200W	4x50W	13,000-14,000	MH 400W, MH-HPS 250W