


**ITPL-2**  
LED Panel Light

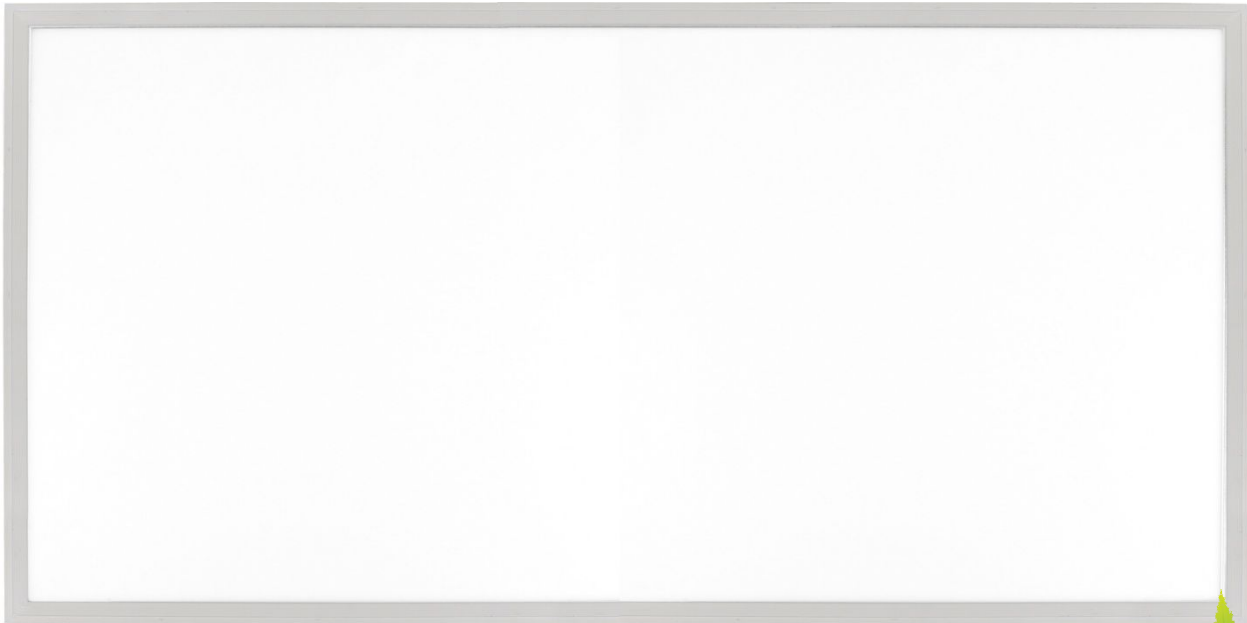

LUMITRON

*Energy Saving Lighting* 

LUMITRON REF.	ITPL-2-600x1,200	
Power	80W	
Input Voltage	100-240VAC	
Initial Flux	Warm White	5,200-5,500Lm
	Natural White	5,300-5,700Lm
	Daylight White	5,500-5,850Lm
Input Voltage	100-240VAC	
Power Factor	≥0.9	
CRI	≥75	
Operation Temperature	-20°C ~+45°C	
Color Temperature	Warm White	2,800-3,200K
	Natural White	4,000-4,500K
	Daylight White	5,800-6,500K
Beam Angle	120°	
Size	589x1,198x12.5mm	
Installation	Recessed	
	Suspended	
	Surface Mounted	

80W LED	100-240 VAC	CRI >75	Operation -20°C +45°C
Dimmable 0% 100%	CE	ENERGY SAVING	120°
3000K Warm White	4000K Cool White	6500K Daylight	

