

Compact Fluorescent Lamp Ballast บัลลาสต์สำหรับหลอดคอมแพคฟลูออเรสเซนต์





Product Description: This is the magnetic ballast for using with compact fluorescent lamps.

Feature:

- Highest saving of energy for compact fluorescent lamp
- Each Compact Fluorescent Lamp Ballast produced from high quality silicon steels and the best enamel for copper wire which can bear up to 200 Degree Celsius
- Long lifetime usage of the lamp
- Improved energy saving that suitable for most luminaries
- Designed for easy installation at customer's convenience
- Five years guarantee from our company

บัลลาสต์ GATA สำหรับหลอดคอมแพคฟลูออเรสเซนต์หรือหลอดตะเกียบประหยัดไฟ เป็นบัลลาสต์ที่ถูกออกแบบมาเพื่อให้ใช้กับหลอดตะเกียบประหยัดไฟโดยเฉพาะ ผลิตจากลวดทองแดงเกรดพิเศษเคลือบฉนวนที่ทนแรงดันไฟฟ้าได้สูงและทนความร้อนมากกว่า 200 องศาเซลเซียส มีขนาดเล็กกะทัดรัดทำให้สามารถใช้ได้กับโคมไฟทุกประเภท สะดวกต่อการติดตั้งและยังมีอายุการใช้งานยาวนาน อีกทั้งยังช่วยประหยัดไฟอีกด้วย

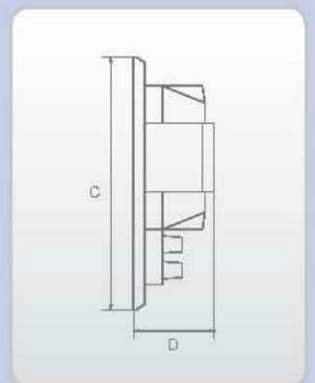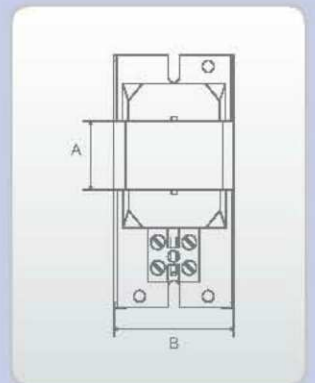

Item Description Ballast	Lamp			P.F.C. Cap. (µF)	Supply (Volt/Hz)	Dimension (mm)				Weight (kg)	PF	Certification
	Watt (W)	Current (A)	Volt (V)			A	B	C	D			
PL4-6	4	0.170	35	2.5	220/50	28	41.5	88	29	0.3	0.24	TIS 1955-2542 TIS 23-2521 Acc. to IEC 60920 IEC 60921
	6	0.175	45	2.0								
PL 7-11	5	0.180	40	2.5	220/50	28	41.5	88	29	0.3	0.30	
	7	0.175	50	2.2							0.32	
	9	0.170	60	2.0							0.36	
	11	0.160	100	1.7							0.47	
PL 13	13	0.170	80	2.0	220/50	28	41.5	88	29	0.3	0.48	
PL 18	18	0.220	100	2.0	220/50	28	41.5	88	29	0.3	0.52	
PL 26	26	0.315	100	2.0	220/50	64	41.5	155	29	0.6	0.49	