


LMRW - 20

Architectural Street Light - IP 65

A premium grade of high quality architectural street light Lumitron's LMRW-20 luminaire, is ideal for landscape application: such as, major traffic roads, gardens, parks, hotels, residential areas precincts, walkways, and other amenity areas. Designed to achieve superior lighting functionality whilst providing attractive styling and desirable theme.

Specifications

- Housing: corrosion resistant die cast aluminium body.
- UV stabilized polyester powder coat finish in White, Black, Silver.
- Reflector: anodized aluminium reflector.
- Diffuser: heat resistant, toughened safety tempered glass lens.
- Stainless steel screws and silicone rubber gasket.
- Control Gear: built-in type, accommodates ballast, ignitor lampholders VDE approved, and P.F. correction capacitors.
- Lumitron offers only anti-cycling ignitor, super-posed versions to avoid ballast failures during ends of lamp life.
- IP 65, dustproof and jet-proof. Class I Electrical.
- Standard and Conformities: DIN, VDE, IEC.
- Choices of pole:
 - AP: Extruded aluminium pole.
 - SP: Galvanized steel pole.

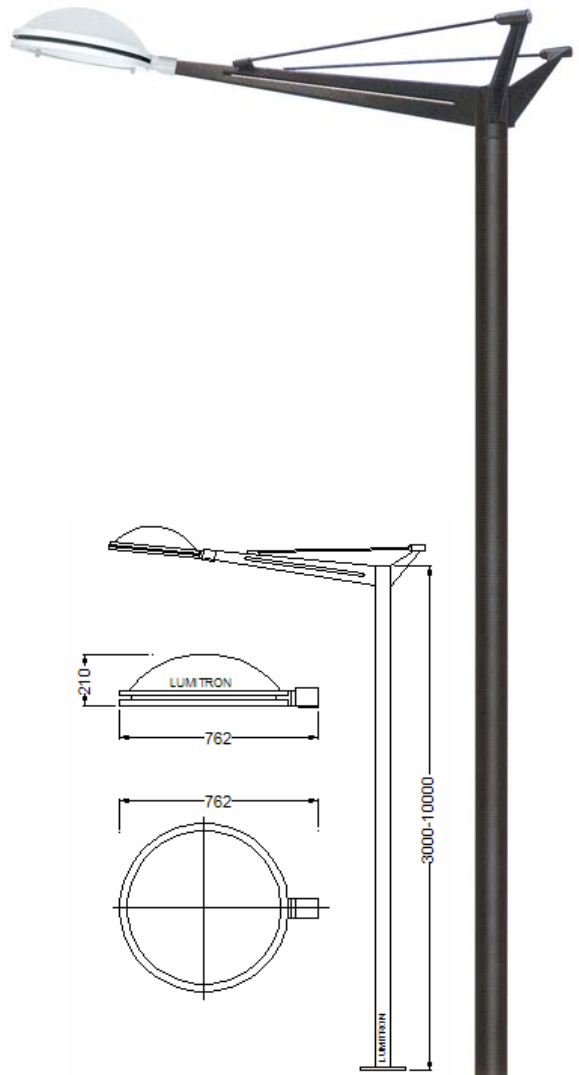

Ordering Information

Lumitron Ref.	Lamp Type	Lumen	Color Temp.	Base
LMRW-20-125MV	MV 125W	6,300	4,000K	E27
LMRW-20-250MV	MV 250W	13,000	4,000K	E40
LMRW-20-150HPS	HPS 150W	14,500	2,000K	E40
LMRW-20-250HPS	HPS 250W	27,000	2,000K	E40
LMRW-20-400HPS	HPS 400W	48,000	2,000K	E40
LMRW-20-150MH	MH 150W	14,250	3,200-4,000K	E27
LMRW-20-250MH	MH 250W	20,000	3,200-4,000K	E40
LMRW-20-400MH	MH 400W	36,000	3,200-4,000K	E40